



Application boundary comparison and typical mast elevation

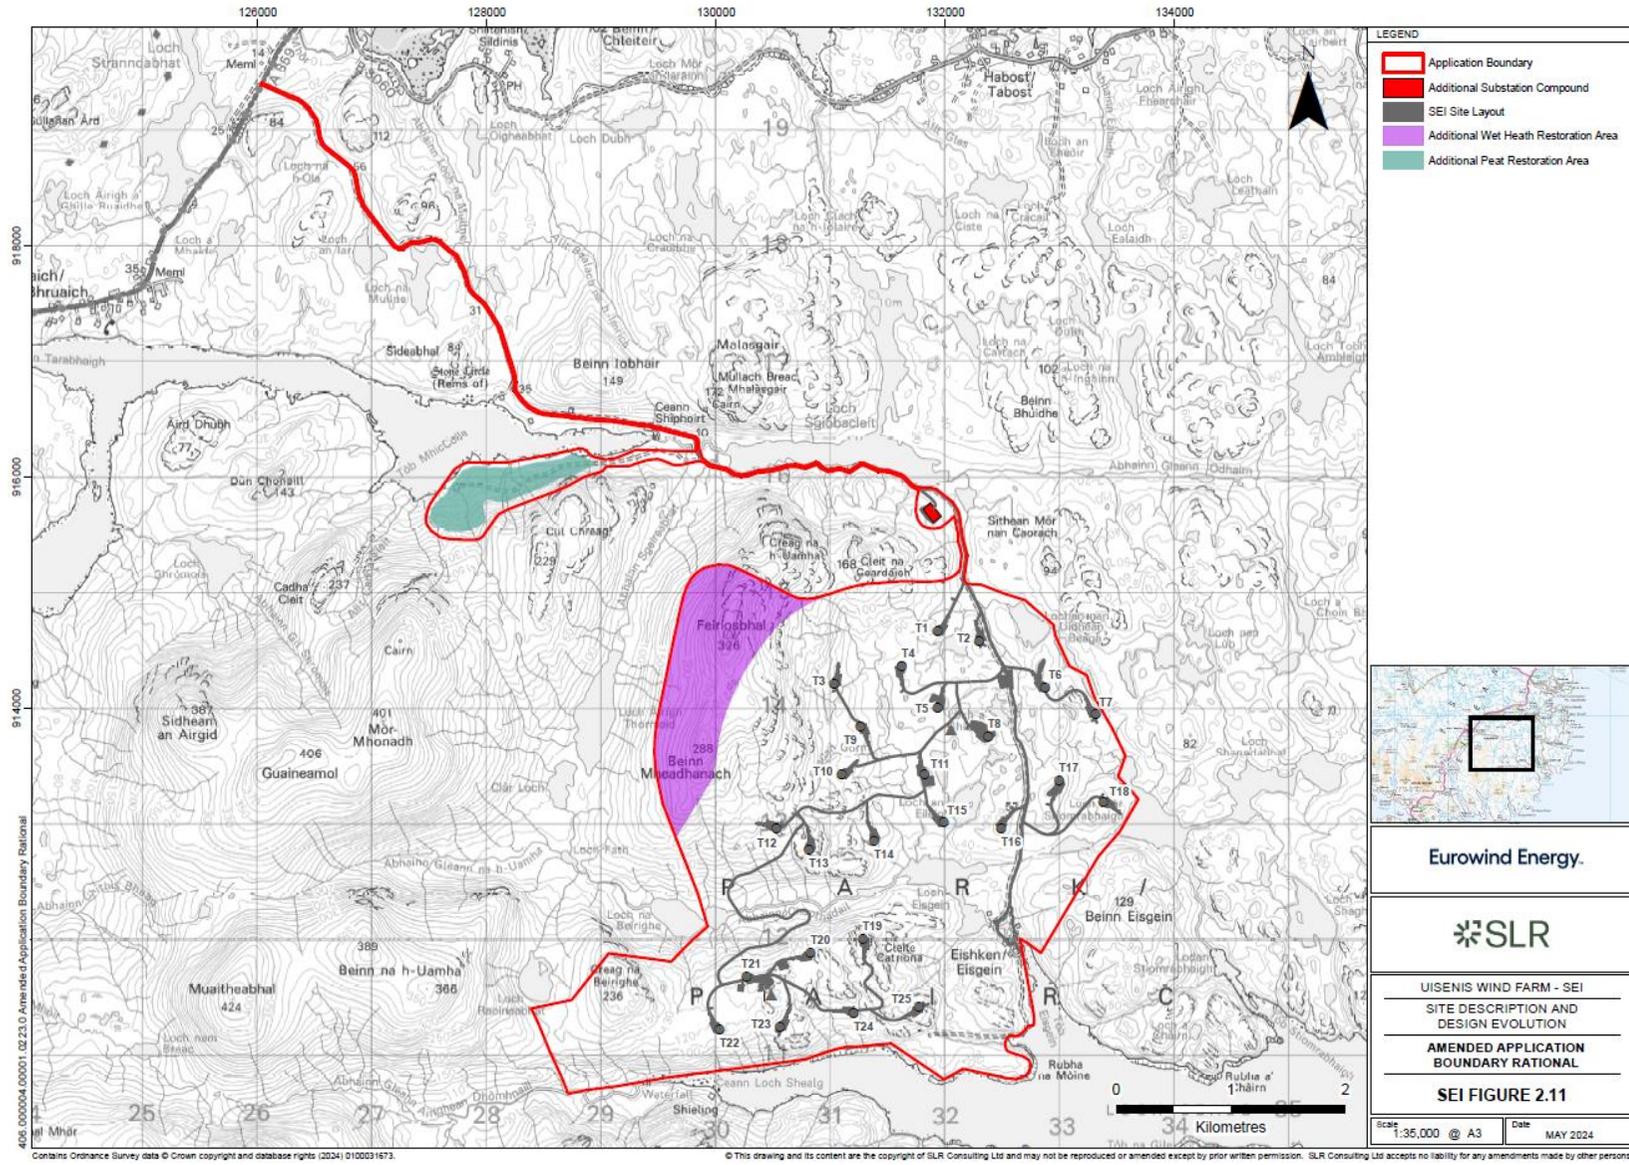

64341.00001\_SEL\Fig 3.11b\_Met\_Mast\_Elevation.dwg

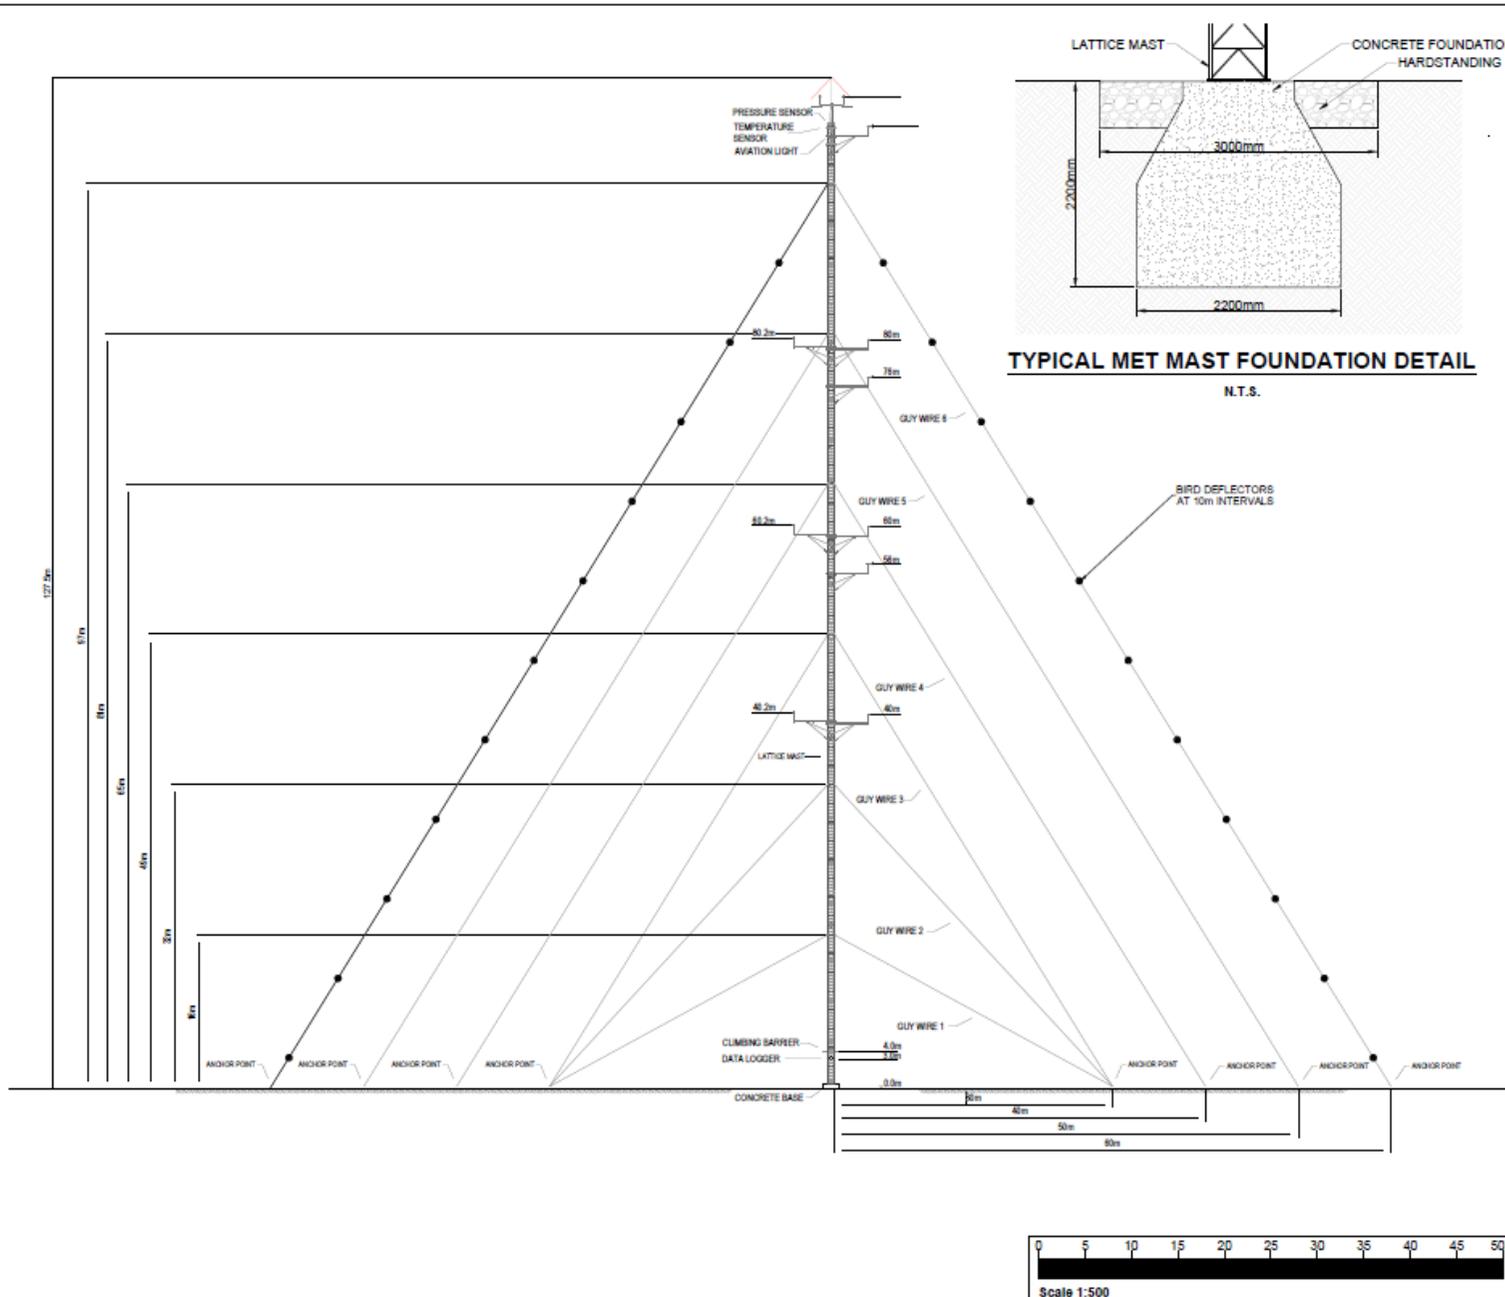

**LEGEND**

1. THE BIRD DEFLECTORS SHALL BE MARKED AT A MINIMUM OF 10m INTERVALS ON THE OUTER WIRES THROUGHOUT THEIR ENTIRE LENGTH. THE DEFLECTORS SHALL BE FITTED IN SUCH A WAY AS TO ENSURE THAT THEY DO NOT SLIDE DOWN THE WIRES.

---

**Eurowind Energy.**

---

**SLR**

---

UISENIS WIND FARM - SEI  
DESCRIPTION OF THE DEVELOPMENT  
METEROLOGICAL MAST - ELEVATION

---

**SEI FIGURE 3.11b**

---

Scale 1:500 @ A3      Date JUNE 2024